

LIFCO

ATTACHMENT CATALOGUE

TABLE OF CONTENTS

ADAPTERS

Top Mount Adapter Plate	3
Volvo S1, S2, S3 Adapter Couplers	4

BUCKETS

Ditching, Grading, & Cleanup Buckets	5
Severe Duty Digging Buckets	6
Skeleton Screening Buckets	7

COUPLERS

Severe Duty Multi-Grab Manual Coupler	8
---------------------------------------	---

RAKES

Compare Rakes	9
Severe Duty Root Rakes	12
Severe Duty Scoop Rakes	13
Heavy Duty Root Rakes	14
Heavy Duty Scoop Rakes	15
Low Profile Rakes	16
Low Profile Scoop Rakes	17
Deep Penetration Root Rakes	18

RIPPERS

Compare Rippers	19
Sabre Tooth Stump & Root Ripper	20
Severe Duty Rock Ripper & Frost Pick	20

STUMP PULLERS	21
---------------	----

TOP MOUNT ADAPTER PLATE

LIFCO
HYDRAULICS & ATTACHMENTS

- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Pin spacing to your machine specifications.
- Bolt pattern to customer specifications.
- Bottom of base plate milled perfectly flat on all Regular Top Mounts. Economy Top Mount bottom is not perfectly flat without upgrading.
- The Economy Top Mount option has welded in non-removable pins (for use with Quick Couplers only).



[CLICK TO CHECK AVAILABILITY & PRICING](#)

Machine Class	Regular Top Mount (for Removable Pins)	*Economy Quick Coupler Top Mount
8-11 Ton	(TMAP-0000-08-11-R)	(TMAP-0000-08-11-E)
12-16 Ton	(TMAP-0000-12-16-R)	(TMAP-0000-12-16-E)
17-21 Ton	(TMAP-0000-17-21-R)	(TMAP-0000-17-21-E)
22-27 Ton	(TMAP-0000-22-27-R)	(TMAP-0000-22-27-E)
28-35 Ton	(TMAP-0000-28-35-R)	(TMAP-0000-28-35-E)
36-44 Ton	(TMAP-0000-36-44-R)	(TMAP-0000-36-44-E)
45-55 Ton	(TMAP-0000-45-55-R)	(TMAP-0000-45-55-E)

Wedge Style Ears (Non-standard only): Available.

*Flat bottom upgrades are available.

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

VOLVO S1, S2, S3 ADAPTER COUPLERS

Volvo S1, S2, S3 couplers are also known as Bofors and Ackerman. Used on plate compactors, hydraulic rock breakers, shears, pulverizers or any other Excavator Attachment. Bolt-on or Weld-on styles available.

Weld-on style without bolt-holes (normally in stock) do not require the bottom surface to be machined perfectly flat. Any bolt-on style top mount normally needs to be milled flat (see Milled Flat Bottom Plate option below).


[CLICK TO CHECK AVAILABILITY & PRICING](#)

LIFCO
HYDRAULICS & ATTACHMENTS



SHIMS

1/16" Thick Shims
1/32" Thick Shims



Volvo Coupler Class	Standard Adapter Mounting Head	Milled Flat Bottom Plate	Built into another Attachment
S1 (EC150, EC160, EC170, EC180, EC200, EC210, EC235, EC240)	(VAMH-0000-15-24-S1)	(Product Upgrade)	(Product Upgrade)
S2 (EC240, EC250, EC290, EC300)	(VAMH-0000-25-30-S2)	(Product Upgrade)	(Product Upgrade)
S3 (EC330, EC340, EC350, EC360, EC380, EC390, EC460, EC480)	(VAMH-0000-33-48-S3)	(Product Upgrade)	(Product Upgrade)

Mounting pins sold separately.

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com


All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

DITCHING, GRADING & CLEANUP BUCKET

LIFCO
HYDRAULICS & ATTACHMENTS

- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Tapered side plates.
- Comes standard with bolt-on Cutting Edge, Drainage Holes and bottom Wear Strips.

CLICK TO CHECK STOCK AVAILABILITY & SEE PRICING

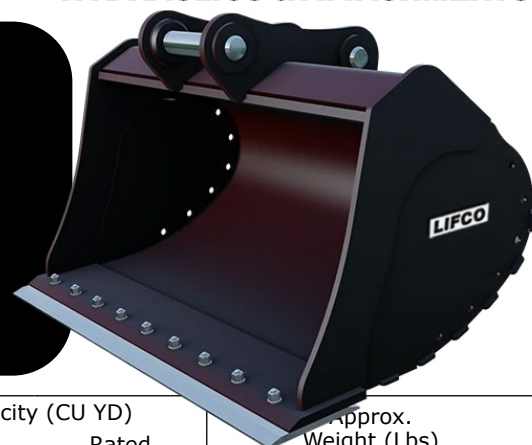

Machine Class	Product Code	Bucket		Capacity (CU YD)		Approx. Weight (Lbs)
		Width	Cut	Struck	Rated	
12-16 Ton	DCB-042-12-16-0	42"	43.5"	0.41	0.53	809
	DCB-048-12-16-0	48"	49.5"	0.47	0.61	924
	DCB-054-12-16-0	54"	56.5"	0.53	0.70	1038
	DCB-060-12-16-0	60"	61.5"	0.60	0.78	1152
	DCB-072-12-16-0	72"	73.5"	0.72	0.94	1268
17-21 Ton	DCB-048-17-21-0	48"	49.5"	0.58	0.64	1099
	DCB-054-17-21-0	54"	55.5"	0.65	0.73	1200
	DCB-060-17-21-0	60"	61.5"	0.73	1.02	1276
	DCB-066-17-21-0	66"	67.5"	0.80	1.12	1373
	DCB-072-17-21-0	72"	73.5"	0.87	1.22	1449
22-27 Ton	DCB-048-22-27-0	48"	50"	0.80	1.08	1659
	DCB-054-22-27-0	54"	56"	0.90	1.23	1787
	DCB-060-22-27-0	60"	62"	1.00	1.38	1883
	DCB-066-22-27-0	66"	68"	1.10	1.52	1979
	DCB-072-22-27-0	72"	74"	1.30	1.77	2106
28-35 Ton	DCB-048-28-35-0	48"	50.5"	1.01	1.41	2156
	DCB-054-28-35-0	54"	56.5"	1.13	1.53	2330
	DCB-060-28-35-0	60"	62.5"	1.25	1.71	2489
	DCB-066-28-35-0	66"	68.5"	1.38	1.90	2700
	DCB-072-28-35-0	72"	74.5"	1.51	2.09	2872
36-44 Ton	DCB-054-36-44-0	54"	56.5"	1.24	1.67	2758
	DCB-060-36-44-0	60"	62.5"	1.38	1.88	2905
	DCB-066-36-44-0	66"	68.5"	1.51	2.07	3096
	DCB-072-36-44-0	72"	74.5"	1.61	2.28	3300
	DCB-078-36-44-0	78"	80.5"	1.79	2.49	3459
45-55 Ton	DCB-060-45-55-0	60"	63"	1.48	2.01	3523
	DCB-066-45-55-0	66"	69"	1.63	2.24	3735
	DCB-072-45-55-0	72"	75"	1.78	2.46	3990
	DCB-078-45-55-0	78"	81"	1.92	2.67	4213
	DCB-084-45-55-0	84"	87"	2.07	2.89	4404

For High Capacity Buckets, use the next class up.

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

SEVERE DUTY DIGGING BUCKET **LIFCO**

HYDRAULICS & ATTACHMENTS

- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- D-Ring Lifting Lug welded on the back.
- AR400 Wear Strips come standard. Side cutters and additional wear components are optional. Ask us about our Extreme Duty Buckets.
- Comes standard with CAT style Rock Chisel J-Series teeth. Optional Spade Teeth or other tooth preferences are available (please inquire).



CLICK TO CHECK AVAILABILITY & PRICING

Machine Class	Product Code	Teeth	Cut Width	Approx. Weight (Lbs)	*Rated Capacity (Cu Yd)
12-16 Ton	SDDB-018-12-16-3	3	18"	921	0.32
	SDDB-024-12-16-4	4	24"	1062	0.49
	SDDB-030-12-16-4	4	30"	1166	0.67
	SDDB-036-12-16-5	5	36"	1307	0.85
	SDDB-042-12-16-5	5	42"	1411	1.03
	SDDB-048-12-16-5	5	48"	1514	1.22
17-21 Ton	SDDB-024-17-21-3	3	24"	1213	0.60
	SDDB-030-17-21-4	4	30"	1373	0.82
	SDDB-036-17-21-5	5	36"	1534	1.04
	SDDB-042-17-21-5	5	42"	1656	1.27
	SDDB-048-17-21-6	6	48"	1816	1.51
22-27 Ton	SDDB-024-22-27-3	3	24"	1668	0.66
	SDDB-030-22-27-4	4	30"	1879	0.91
	SDDB-036-22-27-5	5	36"	2091	1.17
	SDDB-042-22-27-5	5	42"	2259	1.44
	SDDB-048-22-27-6	6	48"	2470	1.71
	SDDB-054-22-27-6	6	54"	2638	1.98
28-35 Ton	SDDB-024-28-35-3	3	24"	2067	0.67
	SDDB-030-28-35-4	4	30"	2337	0.94
	SDDB-036-28-35-5	5	36"	2607	1.21
	SDDB-042-28-35-5	5	42"	2796	1.49
	SDDB-048-28-35-6	6	48"	3066	1.78
	SDDB-054-28-35-6	6	54"	3255	2.07

Machine Class	Product Code	Teeth	Cut Width	Approx. Weight (Lbs)	*Rated Capacity (Cu Yd)
36-44 Ton	SDDB-024-36-44-3	3	24"	2606	0.70
	SDDB-030-36-44-3	3	30"	2844	0.99
	SDDB-036-36-44-4	4	36"	3175	1.29
	SDDB-042-36-44-4	4	42"	3413	1.59
	SDDB-048-36-44-5	5	48"	3745	1.91
	SDDB-054-36-44-5	5	54"	3982	2.23
	SDDB-060-36-44-6	6	60"	4314	2.55
	SDDB-066-36-44-6	6	66"	4552	2.87
	SDDB-030-45-55-3	3	30"	3777	1.07
	SDDB-036-45-55-4	4	36"	4230	1.41
45-55 Ton	SDDB-042-45-55-4	4	42"	4515	1.76
	SDDB-048-45-55-5	5	48"	4969	2.13
	SDDB-054-45-55-5	5	54"	5254	2.50
	SDDB-060-45-55-6	6	60"	5708	2.87
	SDDB-066-45-55-6	6	66"	5993	3.24
	SDDB-072-45-55-7	7	72"	6446	3.62

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

*Rated Capacity is heaped. Struck Capacity is approx. 25% less.

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

SKELETON SCREENING BUCKET **LIFCO**

HYDRAULICS & ATTACHMENTS

- Solid AR400 extra thick ribs last long for high abrasion.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Standard screening gap is 4" but we do custom sizes as well.
- Sift screen rocks, brush and large debris while leaving behind the soil.
- Comes standard with CAT style J-Series teeth.
- Swap teeth for bolt-on cutting edge at no extra charge. If you require a different style of tooth, please inquire.

CLICK TO CHECK AVAILABILITY & PRICING



Machine Class	Product Code	Teeth	Width	Approx. Weight (Lbs)	Cu Yd. Capacity
12-16 Ton	SSB-036-12-16-5	5	36"	1480	0.83
	SSB-042-12-16-5	5	42"	1660	0.92
	SSB-048-12-16-6	6	48"	1854	1.11
17-21 Ton	SSB-036-17-21-5	5	36"	1774	0.93
	SSB-042-17-21-5	5	42"	2006	1.05
	SSB-048-17-21-6	6	48"	2104	1.22
22-27 Ton	SSB-042-22-27-5	5	42"	2176	1.24
	SSB-048-22-27-6	6	48"	2420	1.42
	SSB-054-22-27-6	6	54"	2685	1.58
28-35 Ton	SSB-048-28-35-5	5	48"	3087	1.58
	SSB-054-28-35-6	6	54"	3266	1.72
	SSB-060-28-35-7	7	60"	3439	1.89
36-44 Ton	SSB-048-36-44-5	5	48"	4208	2.10
	SSB-054-36-44-6	6	54"	4401	2.26
	SSB-060-36-44-7	7	60"	4585	2.51
45-60 Ton	SSB-054-45-60-6	6	54"	5650	2.44
	SSB-060-45-60-6	6	60"	5920	2.75
	SSB-072-45-60-7	7	72"	6430	3.36

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

SEVERE DUTY MULTI-GRAB MANUAL COUPLER

LIFCO
HYDRAULICS & ATTACHMENTS

- Includes 1 set of Hardened Alloy pins.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Change attachments in minutes. No pins to hammer.
- Grabs variable pin centres.
- Requires only a 1/2" drive ratchet to operate.
- Cinches up the slack as pins and coupler wear.



CLICK TO CHECK AVAILABILITY & PRICING

Multi-Grab Ranges	4 to 9 Ton Machines				10 to 78 Ton Machines						
Pin Size	40mm	45mm	50mm	55mm	60mm	65mm	70mm	80mm	90mm	100mm	110mm
Grab Range Min	8 1/2"	8 3/4"	9"	12"	12 1/2"	12 1/2"	13 3/4"	15 1/4"	16 3/4"	17 1/2"	19"
Grab Range Max	Customized per OEM Specs				17"	17 1/2"	18 3/4"	20 3/4"	23 1/2"	25"	26"
4-6 Ton Machine Class	MGC40-4-6 / MGC45-4-6 / MGC50-4-6										
7-9 Ton Machine Class	MGC40-7-9 / MGC45-7-9 / MGC50-7-9				MGC60-7-9						
10-14 Ton Machine Class	MGC40-10-14 / MGC45-10-14 / MGC50-10-14				MGC60-10-14	MGC65-10-14	MGC70-10-14				
15-19 Ton Machine Class					MGC60-15-19	MGC65-15-19	MGC70-15-19	MGC80-15-19			
20-25 Ton Machine Class							MGC70-20-25	MGC80-20-25			
26-30 Ton Machine Class								MGC80-26-30	MGC90-26-30		
31-36 Ton Machine Class								MGC80-31-36	MGC90-31-36	MGC100-31-36	
37-45 Ton Machine Class									MGC90-37-45	MGC100-37-45	MGC110-37-45
46-55 Ton Machine Class										MGC100-46-55	MGC110-46-55

Pins sold separately.

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

COMMON RAKE USES


	HEAVY DUTY ROOT RAKE	SEVERE DUTY ROOT RAKE	HEAVY DUTY SCOOP RAKE	SEVERE DUTY SCOOP RAKE	LOW PROFILE RAKE	LOW PROFILE SCOOP RAKE	DEEP PENETRATION RAKE
Breaking up the Ground Soil	✓	✓	✓	✓	✓	✓	✓
Removing Smaller Rocks & Loose Roots	✓	✓	✓	✓	✓	✓	✓
Removing Larger Rocks & Cutting Through Roots		✓		✓			✓
Removing Stumps		✓		✓			✓
Demolition Cleanup		✓		✓			
Screening			✓	✓		✓	
Thumb Compatibility	✓	✓					

STANDARD VS SCOOP SHAPE

The shape of your rake is crucial as it will dictate how you will collect, clear, and separate different types of material.

A. The Standard shape is the ideal geometry for use with a thumb for grappling.

B. The Scoop shape has the ability to move greater amounts of material, without needing a thumb.

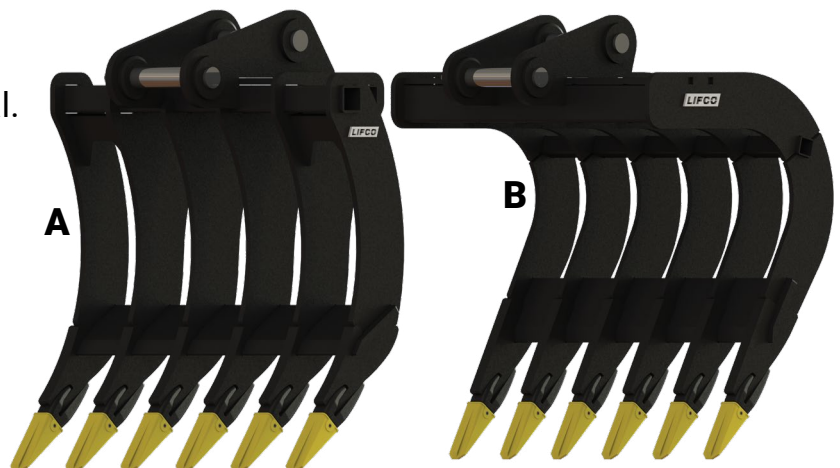

LOW PROFILE VS DEEP PENETRATION

A. Our Low Profile Rakes have a small screening gap to leave a clean finish in the ground.


B. Longer and Thicker shanks on the Deep Penetration Rake allow for use in extreme conditions.

C. The Deep Penetration Rake has replaceable teeth, making it easier to do a quick repair without leaving your work site, should a tooth break. The Low Profile would be used after all the large objects have been removed by the Deep Penetration Rake, and usually do not require replaceable teeth.



HEAVY DUTY VS SEVERE DUTY

- A. The Heavy Duty has thinner shanks to leave a cleaner finish. Since the Severe Duty will be used on tougher materials, it has thicker shanks for longevity.
- B. A Severe Duty rake features a bevel on the cutting edge to aid in cutting through roots.
- C. The Severe Duty has replaceable teeth, making it easier to do a quick repair without leaving your work site.

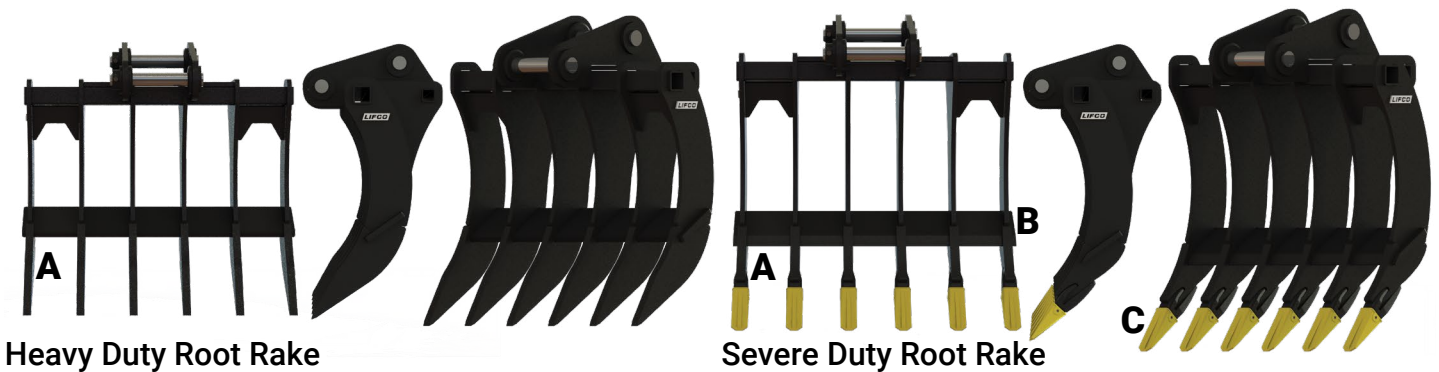

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

SEVERE DUTY ROOT RAKE

LIFCO
HYDRAULICS & ATTACHMENTS

- Case hardened pin bosses.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Tapered Cutting Edge easily cuts through roots.
- Extra thick shanks support themselves without gussets.
- Comes standard with CAT style J-Series teeth. If you require a different style of tooth, please inquire.

CLICK TO CHECK AVAILABILITY & PRICING



Machine Class	Product Code	Tines	Width	Shank Thickness	Tooth Type	Approx. Weight (Lbs)
8-11 Ton	SDR-036-08-11-4	4	36"	1.25"	J200	537
	SDR-042-08-11-5	5	42"			549
	SDR-048-08-11-6	6	48"			657
12-16 Ton	SDR-036-12-16-4	4	36"	1.50"	J225	826
	SDR-042-12-16-5	5	42"			879
	SDR-048-12-16-6	6	48"			1045
17-21 Ton	SDR-048-17-21-5	5	48"	1.75"	J250	1303
	SDR-054-17-21-5	5	54"			1291
	SDR-060-17-21-6	6	60"			1496
22-27 Ton	SDR-048-22-27-5	5	48"	2.00"	J300	1764
	SDR-060-22-27-6	6	60"			1937
	SDR-072-22-27-7	7	72"			2285
28-35 Ton	SDR-048-28-35-5	5	48"	2.50"	J350	2552
	SDR-060-28-35-6	6	60"	2.00"		2461
	SDR-072-28-35-7	7	72"			2909
36-44 Ton	SDR-060-36-44-6	6	60"	2.50"	J400	3143
	SDR-072-36-44-7	7	72"			3710
	SDR-084-36-44-8	8	84"			4024
45-55 Ton	SDR-060-45-55-6	6	60"	3.00"	J450	4510
	SDR-072-45-55-7	7	72"	2.50"	J400	4808
	SDR-084-45-55-8	8	84"			5156

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

SEVERE DUTY SCOOP RAKE

LIFCO
HYDRAULICS & ATTACHMENTS

- Case hardened pin bosses.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Tapered Cutting Edge easily cuts through roots.
- Extra thick shanks support themselves without gussets.
- Comes standard with CAT style J-Series teeth. If you require a different style of tooth, please inquire.

CLICK TO CHECK AVAILABILITY & PRICING



Machine Class	Product Code	Tines	Width	Shank Thickness	Tooth Type	Approx. Weight (Lbs)
8-11 Ton	SDSR-036-08-11-4	4	36"	1.25"	J200	547
	SDSR-042-08-11-5	5	42"			655
	SDSR-048-08-11-6	6	48"			763
12-16 Ton	SDSR-036-12-16-4	4	36"	1.50"	J225	871
	SDSR-042-12-16-5	5	42"			1043
	SDSR-048-12-16-6	6	48"			1215
17-21 Ton	SDSR-048-17-21-5	5	48"	1.75"	J250	1611
	SDSR-054-17-21-5	5	54"			1492
	SDSR-060-17-21-6	6	60"			1721
22-27 Ton	SDSR-048-22-27-5	5	48"	2.00"	J300	1902
	SDSR-060-22-27-6	6	60"			2278
	SDSR-072-22-27-7	7	72"			2654
28-35 Ton	SDSR-048-28-35-5	5	48"	2.50"	J350	2715
	SDSR-060-28-35-6	6	60"	2.00"		2870
	SDSR-072-28-35-7	7	72"			3338
36-44 Ton	SDSR-060-36-44-6	6	60"	2.50"	J400	3795
	SDSR-072-36-44-7	7	72"			4434
		SDSR-084-36-44-8	8	84"	2.00"	J350
45-55 Ton	SDSR-060-45-55-6	6	60"	3.00"	J450	5592
	SDSR-072-45-55-7	7	72"	2.50"	J400	5841
	SDSR-084-45-55-8	8	84"			6663

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

HEAVY DUTY ROOT RAKE

- Case hardened pin bosses.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Material easily flows through shanks leaving smaller stones & debris in the ground.
- Thick shanks support themselves without gussets.
- Heavy Duty Rakes are not designed for extreme applications (eg. Deep penetration in hard ground, ripping out large stumps and rocks, etc.). Please inquire about our Severe Duty Root Rakes which are designed for these extreme applications.

CLICK TO CHECK AVAILABILITY & PRICING

LIFCO
HYDRAULICS & ATTACHMENTS



Correction: Edge is not beveled as shown in the photo.

Machine Class	Product Code	Tines	Width	Shank Thickness	Approx. Weight (Lbs)
8-11 Ton	HDRR-036-08-11-4	4	36"	1.00"	511
	HDRR-042-08-11-5	5	42"		537
	HDRR-048-08-11-6	6	48"		643
12-16 Ton	HDRR-036-12-16-4	4	36"	1.25"	786
	HDRR-042-12-16-5	5	42"		824
	HDRR-048-12-16-6	6	48"		978
17-21 Ton	HDRR-048-17-21-4	4	48"	1.50"	1276
	HDRR-054-17-21-5	5	54"		1190
	HDRR-060-17-21-6	6	60"		1402
22-27 Ton	HDRR-048-22-27-5	5	48"	1.75"	1692
	HDRR-060-22-27-6	6	60"		1843
	HDRR-072-22-27-7	7	72"		1993
28-35 Ton	HDRR-048-28-35-5	5	48"	2.00"	2443
	HDRR-060-28-35-6	6	60"		2416
	HDRR-072-28-35-7	7	72"		2853
36-44 Ton	HDRR-060-36-44-6	6	60"	2.00"	2851
	HDRR-072-36-44-7	7	72"		3364
	HDRR-084-36-44-8	8	84"		3155
45-55 Ton	HDRR-060-45-55-6	6	60"	2.50"	4266
	HDRR-072-45-55-7	7	72"		4707
	HDRR-084-45-55-8	8	84"		5028

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

HEAVY DUTY SCOOP RAKE

LIFCO
HYDRAULICS & ATTACHMENTS

- Case hardened pin bosses.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Material easily flows through shanks leaving smaller stones & debris in the ground.
- Thick shanks support themselves without gussets.
- Heavy Duty Rakes are not designed for extreme applications (eg. Deep penetration in hard ground, ripping out large stumps and rocks, etc.). Please inquire about our Severe Duty Scoop Rakes which are designed for these extreme applications.



CLICK TO CHECK AVAILABILITY & PRICING

Machine Class	Product Code	Tines	Width	Shank Thickness	Approx. Weight (Lbs)
8-11 Ton	HDSR-036-08-11-4	4	36"	1.00"	534
	HDSR-042-08-11-5	5	42"		637
	HDSR-048-08-11-6	6	48"		739
12-16 Ton	HDSR-036-12-16-4	4	36"	1.25"	850
	HDSR-042-12-16-5	5	42"		1013
	HDSR-048-12-16-6	6	48"		1177
17-21 Ton	HDSR-048-17-21-4	4	48"	1.50"	1383
	HDSR-054-17-21-5	5	54"		1454
	HDSR-060-17-21-6	6	60"		1670
22-27 Ton	HDSR-048-22-27-5	5	48"	1.75"	1858
	HDSR-060-22-27-6	6	60"		2221
	HDSR-072-22-27-7	7	72"		2585
28-35 Ton	HDSR-048-28-35-5	5	48"	2.00"	2647
	HDSR-060-28-35-6	6	60"		2865
	HDSR-072-28-35-7	7	72"		3329
36-44 Ton	HDSR-060-36-44-6	6	60"	2.00"	3566
	HDSR-072-36-44-7	7	72"		4161
	HDSR-084-36-44-8	8	84"		4232
45-55 Ton	HDSR-060-45-55-6	6	60"	2.50"	5440
	HDSR-072-45-55-7	7	72"		5844
	HDSR-084-45-55-8	8	84"		6659

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

LOW PROFILE RAKE

LIFCO
HYDRAULICS & ATTACHMENTS

- Features an extra wide body with close tines. These are used after all the large rocks and big stumps have been removed. They work great to get all the loose roots and smaller rocks out, leaving you with a nice landscaped finish.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Thick shanks support themselves without gussets.
- Standard screening gap is 6 inches. We do custom sizes between 4" and 8" as well, please call for custom quote.
- Heavy Duty Low Profile Rakes are not designed for extreme applications (eg. Deep penetration in hard ground, ripping out large stumps and rocks, etc.). Please inquire about our Severe Duty Rakes.

CLICK TO CHECK AVAILABILITY & PRICING



Machine Class	Product Code	Width	Shank Thickness	Rake Height	Approx. Weight (Lbs)
8-11 Ton	LPR-048-08-11-6	48"	0.75"	14"	489
	LPR-060-08-11-6	60"			550
	LPR-072-08-11-6	72"			648
12-16 Ton	LPR-060-12-16-6	60"	1.00"	15"	853
	LPR-072-12-16-6	72"			1003
	LPR-084-12-16-6	84"			1099
17-21 Ton	LPR-060-17-21-6	60"	1.25"	16"	1139
	LPR-072-17-21-6	72"			1261
	LPR-084-17-21-6	84"			1463
22-27 Ton	LPR-060-22-27-6	60"	1.25"	17"	1326
	LPR-072-22-27-6	72"			1462
	LPR-084-22-27-6	84"			1689
28-35 Ton	LPR-072-28-35-6	72"	1.50"	18"	2173
	LPR-084-28-35-6	84"			2505
	LPR-096-28-35-6	96"			2706
36-44 Ton	LPR-084-36-44-6	84"	1.75"	19"	2749
	LPR-096-36-44-6	96"			3141
	LPR-108-36-44-6	108"			3373
45-55 Ton	LPR-096-45-55-6	96"	2.00"	20"	3942
	LPR-108-45-55-6	108"			4454
	LPR-120-45-55-6	120"			4752

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

LOW PROFILE SCOOP RAKE **LIFCO**

HYDRAULICS & ATTACHMENTS

- Features an extra wide body with close tines. These are used after all the large rocks and big stumps have been removed. They work great to get all the loose roots and smaller rocks out, leaving you with a nice landscaped finish.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Thick shanks support themselves without gussets.
- Standard screening gap is 6 inches. We do custom sizes between 4" and 8" as well, please call for custom quote.
- Heavy Duty Low Profile ScoopRakes are not designed for extreme applications (eg. Deep penetration in hard ground, ripping out large stumps and rocks, etc.). Please inquire about our Severe Duty Scoop Rakes.

CLICK TO CHECK AVAILABILITY & PRICING



Machine Class	Product Code	Tines	Width	Shank Thickness	Rake Height	Approx. Weight (Lbs)
8-11 Ton	LPSR-048-08-11-08	8	48"	0.75"	20"	536
	LPSR-060-08-11-09	9	60"			626
	LPSR-072-08-11-11	11	72"			749
12-16 Ton	LPSR-060-12-16-09	9	60"	1.00"	22"	982
	LPSR-072-12-16-11	11	72"			1173
	LPSR-084-12-16-12	12	84"			1308
17-21 Ton	LPSR-060-17-21-09	9	60"	1.25"	25"	1354
	LPSR-072-17-21-10	10	72"			1537
	LPSR-084-17-21-12	12	84"			1805
22-27 Ton	LPSR-060-22-27-09	9	60"	1.25"	28"	1670
	LPSR-072-22-27-10	10	72"			1886
	LPSR-084-22-27-12	12	84"			2210
28-35 Ton	LPSR-072-28-35-10	10	72"	1.50"	32"	2544
	LPSR-084-28-35-12	12	84"			2979
	LPSR-096-28-35-13	13	96"			3260
36-44 Ton	LPSR-084-36-44-11	11	84"	1.75"	36"	4140
	LPSR-096-36-44-13	13	96"			4802
	LPSR-108-36-44-14	14	108"			5213
45-55 Ton	LPSR-096-45-55-12	12	96"	2.00"	40"	6025
	LPSR-108-45-55-14	14	108"			6899
	LPSR-120-45-55-15	15	120"			7444

Pins sold separately. Wedge Style Ears: Available (Non-standard only).

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

DEEP PENETRATION RAKE

LIFCO
HYDRAULICS & ATTACHMENTS

- Case hardened pin bosses.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Extra thick shanks support themselves without gussets.
- Comes standard with CAT style J-Series teeth. If you require a different style of tooth, please inquire.

CLICK TO CHECK AVAILABILITY & PRICING



Machine Class	Product Code	Tines	Width	Shank Thickness	Tooth Type	Ground Penetration	Approx. Weight (Lbs)
8-11 Ton	DPRR-022-08-11-4	4	22"	1.25"	J225	24"	621
	DPRR-026-08-11-5	5	26"				765
12-16 Ton	DPRR-034-12-16-4	4	34"	1.50"	J225	28"	983
	DPRR-046-12-16-5	5	46"				1263
17-21 Ton	DPRR-042-17-21-4	4	42"	1.75"	J250	32"	1457
	DPRR-054-17-21-5	5	54"				1838
22-27 Ton	DPRR-042-22-27-4	4	42"	2.00"	J300	36"	1829
	DPRR-048-22-27-5	5	48"				2221
	DPRR-054-22-27-6	6	54"				2612
28-35 Ton	DPRR-042-28-35-4	4	42"	2.50"	J400	38"	2809
	DPRR-048-28-35-5	5	48"	2.00"	J350		2756
	DPRR-054-28-35-6	6	54"				3236
36-44 Ton	DPRR-054-36-44-5	5	54"	2.50"	J400	40"	3629
	DPRR-060-36-44-6	6	60"				4192
	DPRR-066-36-44-7	7	66"				4813
45-55 Ton	DPRR-048-45-55-5	5	48"	3.00"	J450	42"	4660
	DPRR-060-45-55-6	6	60"				5647
	DPRR-072-45-55-7	7	72"				6643

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

LIFCO COMPARE RIPPERS


SABRE TOOTH STUMP AND ROOT RIPPER

A. Our Root Ripper has a normal tip radius (The distance from the center of the main pivot pin to the tip of the tooth). This allows the tip of the root ripper to get underneath most stumps or debris.

B. Our Root Rippers have a serrated front wear plate to allow the ripper to cut roots.

C. Rock Chisel Tooth installed.

D. Longer Shank for deeper penetration.

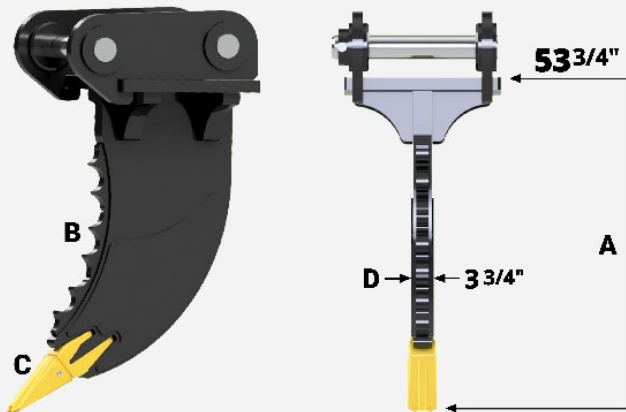


SEVERE DUTY ROCK RIPPER AND FROST PICK

A. The reduced tip radius (The distance from the center of the main pivot pin to the tip of the tooth) increases the amount of force that the ripper exerts at the tip. This is required when breaking up rock or frost.

B. Our Rock Rippers have smooth front and rear wear plates for increased longevity.

C. An oversized Rock Chisel Tooth installed.

D. Extra Thick Shank to accommodate the increased forces caused by the reduced tip radius.

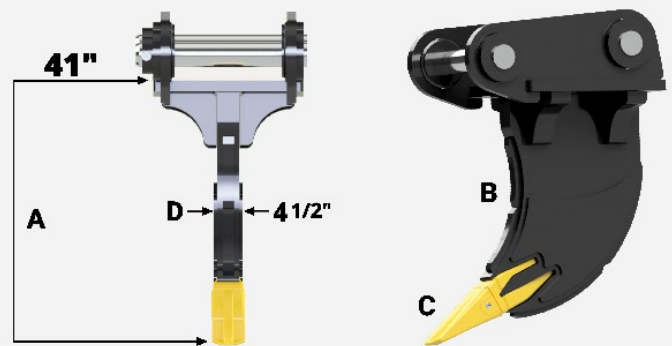

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

SABRE TOOTH STUMP AND ROOT RIPPER

LIFCO
HYDRAULICS & ATTACHMENTS

- AR400 wear plates on sides.
- AR400 Sabre Teeth on front.
- Rock Chisel Tooth installed.
- Longer Shank for deeper penetration.
- Double Shank Ripper also available (please inquire).

Machine Class	Product Code	Shank Thickness	Length*	Tooth Type	Approx. Weight (Lbs)
04-07 Ton	STSR-030-04-07	2.25"	30"	J250	332
08-11 Ton	STSR-036-08-11	2.50"	36"	J300	470
12-22 Ton	STSR-042-12-22	2.00"	42"	J350	988
23-33 Ton	STSR-048-23-33	2.50"	48"	J400	1376
34-45 Ton	STSR-054-34-45	3.00"	54"	J450	1855
46-55 Ton	STSR-060-46-55	3.50"	60"	J550	2756



SEVERE DUTY ROCK RIPPER AND FROST PICK

[CLICK TO CHECK
AVAILABILITY & PRICING](#)

- AR400 wear plates on sides, front edge and back.
- Oversized Rock Chisel Tooth installed.
- Extra Thick Shank.

Machine Class	Product Code	Shank Thickness	Length*	Tooth Type	Approx. Weight (Lbs)
04-07 Ton	SDRR-018-04-07	2.50"	18"	J250	289
08-11 Ton	SDRR-024-08-11	3.00"	24"	J300	425
12-22 Ton	SDRR-030-12-22	2.50"	30"	J350	875
23-33 Ton	SDRR-036-23-33	3.00"	36"	J400	1220
34-45 Ton	SDRR-042-34-45	3.50"	42"	J450	1770
46-55 Ton	SDRR-048-46-55	4.00"	48"	J550	2590

Pins sold separately. Wedge Style Ears: (Non-standard Only) Available.

*Length is measured from the bottom of the base to tip of tooth.



1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

DOUBLE SHANK STUMP PULLER

LIFCO
HYDRAULICS & ATTACHMENTS

- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Double shanks get an extra strong grip on the stump compared to a single shank ripper. Shank edges serrated to grip the stump when pulling it out.
- The cutting edge between the shanks is bevelled and sharpened to make slicing through tap roots a breeze!
- Comes with CAT style J-Series teeth. Other tooth preferences available (please inquire).
- Standard length of shanks is measured from below the baseplate of the ears to the tips of the teeth. This is a reduced length compared to a normal bucket to give the stump puller increased break force. We can build stump pullers to your exact bucket length (tip radius) if that is your preference (please inquire).

CLICK TO CHECK AVAILABILITY & PRICING



Machine Class	Product Code	Width	Length	Tooth Type	Approx. Weight (Lbs)
12-16 Ton	DSSP-015-12-16-2	15"	30"	J300	955
17-21 Ton	DSSP-018-17-21-2	18"	36"	J300	1350
22-27 Ton	DSSP-020-22-27-2	20"	42"	J350	1688
28-35 Ton	DSSP-022-28-35-2	22"	48"	J400	1984
36-44 Ton	DSSP-024-36-44-2	24"	54"	J400	2450
45-55 Ton	DSSP-026-45-55-2	26"	60"	J450	3276

Pins sold separately.

Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849
lifcohydraulics.com
sales@lifcoattachments.com

All attachments include a 1 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.