

F1 Motor



Contents.....	Page
Pump and Line selection.....	13
Specifications.....	39
Ordering code	39
Installation.....	39
Port size	39
Standard versions	39
Suction fittings.....	63
Installation and start up	80

Specifications

Motor frame size F1 -	25-M	41-M	51-M	61-M	81-M	101-M	121-M
Displacement [cm ³ /rev]	25.6	40.9	51.1	59.5	81.6	102.9	118.5
Max operating pressure [bar]							
continuous	250	250	250	250	250	250	250
intermittent ¹⁾	350	350	350	350	350	350	350
Max Shaft speed [rpm]							
- continuous	2 300	2 000	1 800	1 700	1 500	1 400	1300
- intermittent	3 000	2 700	2 400	2 200	2 000	1 800	1700
Torque (theor.) [Nm]							
at 200 bar	81	130	162	189	259	327	376
at 350 bar	142	227	284	331	453	572	658
Max output power [kW]	45	64	72	76	95	108	117
Weight [kg]	8.5	8.5	8.5	8.5	12.5	12.5	12.5

¹⁾ Max 6 seconds in any one minute.

Ordering code

Example: **F1 - 81 - M**
F1 Motor frame size **81**
25, 41, 51, 61, 81, 101 or 121


Port size

F1 motor frame size	Port size
F1-25/41/51/61	3/4"
-81/101/121	1"

Standard versions

Designation	Ordering no.
F1-25-M	378 1724
F1-41-M	378 1740
F1-51-M	378 1750
F1-61-M	378 1760
F1-81-M	378 1780
F1-101-M	378 1800
F1-121-M	378 4120

Installation dimensions

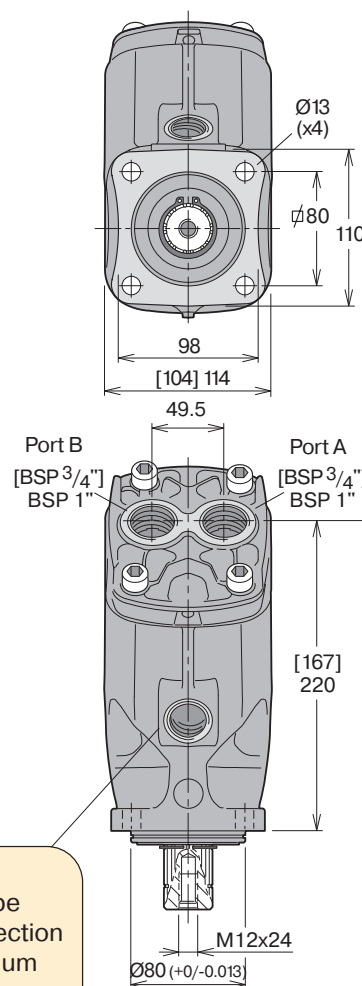

NOTE:

Dimensions, in mm, are valid for all frame sizes, except those in brackets [] which are valid for F1-25/-41/-51/-61-M only.

Note:

Drain line must be mounted. Connection BSP 1/2". Maximum drain line pressure is 5 bar.