



A DIVISION OF LIFCO

2026 RAKE GUIDE



TABLE OF CONTENTS

Compare Rakes	03
Low Profile VS Deep Penetration	04
Heavy Duty VS Severe Duty	05
Severe Duty Root Rakes	06
Severe Duty Scoop Rakes	07
Heavy Duty Root Rakes	08
Heavy Duty Scoop Rakes	09
Low Profile Rakes	10
Low Profile Scoop Rakes	11
Deep Penetration Root Rakes	12

**ALL ATTACHMENTS
ARE MADE IN THE
USA AND CANADA**



COMPARE RAKES

COMMON RAKE USES


	HEAVY DUTY ROOT RAKE	SEVERE DUTY ROOT RAKE	HEAVY DUTY SCOOP RAKE	SEVERE DUTY SCOOP RAKE	LOW PROFILE RAKE	LOW PROFILE SCOOP RAKE	DEEP PENETRATION RAKE
Breaking up the Ground Soil	✓	✓	✓	✓	✓	✓	✓
Removing Smaller Rocks & Loose Roots	✓	✓	✓	✓	✓	✓	✓
Removing Larger Rocks & Cutting Through Roots		✓		✓			✓
Removing Stumps		✓		✓			✓
Demolition Cleanup		✓		✓			
Screening			✓	✓		✓	
Thumb Compatibility	✓	✓					

STANDARD VS SCOOP SHAPE

The shape of your rake is crucial as it will dictate how you will collect, clear, and separate different types of material.

A. The Standard shape is the ideal geometry for use with a thumb for grappling.

B. The Scoop shape has the ability to move greater amounts of material, without needing a thumb.

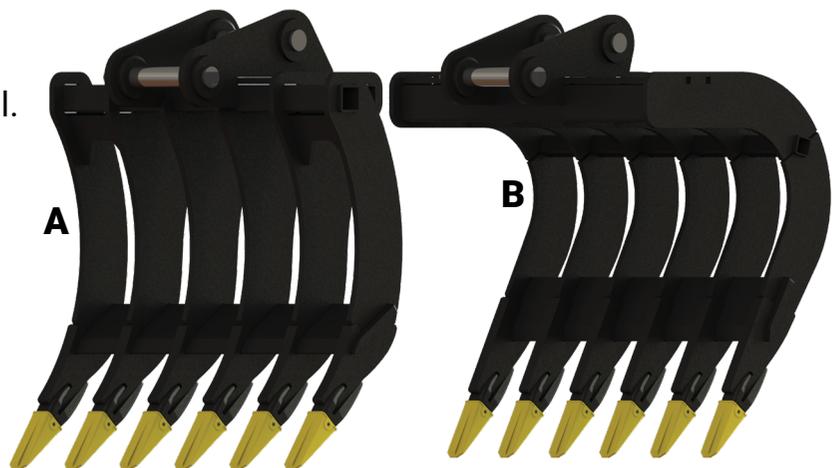

LOW PROFILE VS DEEP PENETRATION

A. Our Low Profile Rakes have a small screening gap to leave a clean finish in the ground.

B. Longer and Thicker shanks on the Deep Penetration Rake allow for use in extreme conditions.

C. The Deep Penetration Rake has replaceable teeth, making it easier to do a quick repair without leaving your work site, should a tooth break. The Low Profile would be used after all the large objects have been removed by the Deep Penetration Rake, and usually do not require replaceable teeth.



Low Profile Rake



Low Profile Scoop Rake





Deep Penetration Rake

HEAVY DUTY VS SEVERE DUTY

A. The Heavy Duty has thinner shanks to leave a cleaner finish. Since the Severe Duty will be used on tougher materials, it has thicker shanks for longevity.

B. A Severe Duty rake features a bevel on the cutting edge to aid in cutting through roots.

C. The Severe Duty has replaceable teeth, making it easier to do a quick repair without leaving your work site.

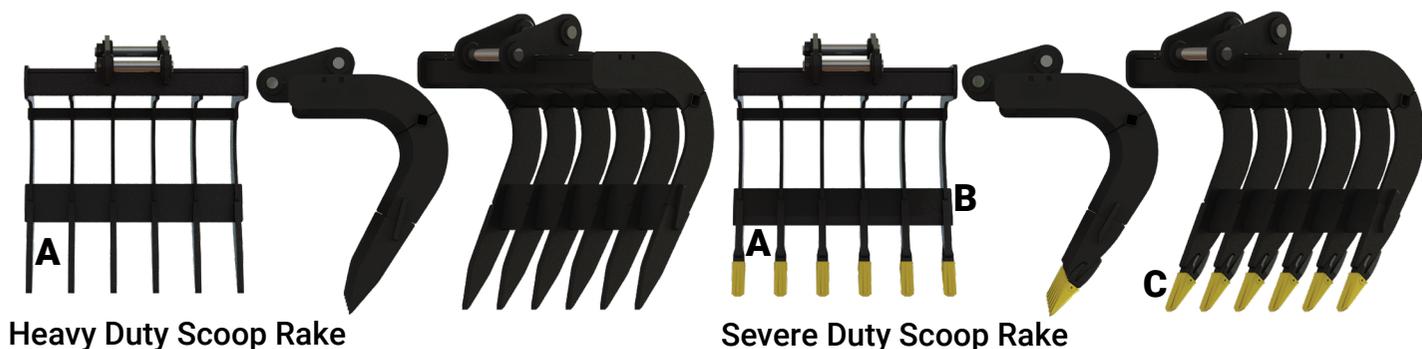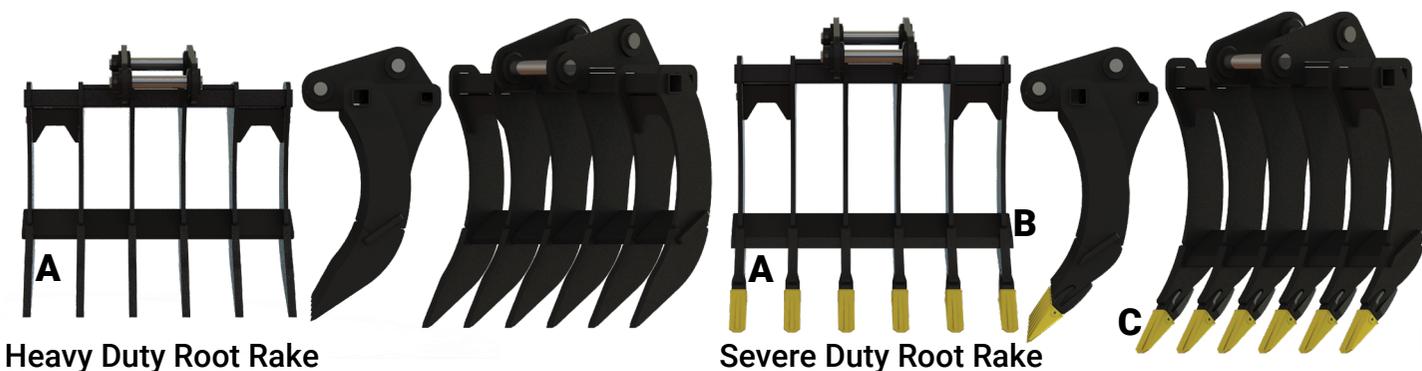

1-800-952-7849

trkattachments.com

sales@trkattachments.com

All attachments include a 2 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

SEVERE DUTY ROOT RAKE



- Case hardened pin bosses.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Tapered Cutting Edge easily cuts through roots.
- Extra thick shanks support themselves without gussets.
- Comes standard with CAT style J-Series teeth. If you require a different style of tooth, please inquire.



CLICK TO CHECK AVAILABILITY & PRICING

Machine Class	Product Code	Tines	Width	Shank Thickness	Tooth Type	Approx. Weight (Lbs)
8-11 Ton	SVDR-008-011-W036T04	4	36"	1.25"	J200	537
	SVDR-008-011-W042T05	5	42"			549
	SVDR-008-011-W048T06	6	48"			657
12-16 Ton	SVDR-012-016-W036T04	4	36"	1.50"	J225	826
	SVDR-012-016-W042T05	5	42"			879
	SVDR-012-016-W048T06	6	48"			1045
17-21 Ton	SVDR-017-021-W048T05	5	48"	1.75"	J250	1303
	SVDR-017-021-W054T05	5	54"			1291
	SVDR-017-021-W060T06	6	60"			1496
22-27 Ton	SVDR-022-027-W048T05	5	48"	2.00"	J300	1764
	SVDR-022-027-W060T06	6	60"			1937
	SVDR-022-027-W072T07	7	72"			2285
28-35 Ton	SVDR-028-035-W048T05	5	48"	2.50"	J350	2552
	SVDR-028-035-W060T06	6	60"	2.00"		2461
	SVDR-028-035-W072T07	7	72"	2909		
36-44 Ton	SVDR-036-044-W060T06	6	60"	2.50"	J400	3143
	SVDR-036-044-W072T07	7	72"			3710
	SVDR-036-044-W084T08	8	84"			4024
45-55 Ton	SVDR-045-055-W060T06	6	60"	3.00"	J450	4510
	SVDR-045-055-W072T07	7	72"	2.50"	J400	4808
	SVDR-045-055-W084T08	8	84"			5156

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849

trkattachments.com

sales@trkattachments.com

All attachments include a 2 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

SEVERE DUTY SCOOP RAKE



- Case hardened pin bosses.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Tapered Cutting Edge easily cuts through roots.
- Extra thick shanks support themselves without gussets.
- Comes standard with CAT style J-Series teeth. If you require a different style of tooth, please inquire.

CLICK TO CHECK AVAILABILITY & PRICING

Machine Class	Product Code	Tines	Width	Shank Thickness	Tooth Type	Approx. Weight (Lbs)
8-11 Ton	SDSR-008-011-W036T04	4	36"	1.25"	J200	547
	SDSR-008-011-W042T05	5	42"			655
	SDSR-008-011-W048T06	6	48"			763
12-16 Ton	SDSR-012-016-W036T04	4	36"	1.50"	J225	871
	SDSR-012-016-W042T05	5	42"			1043
	SDSR-012-016-W048T06	6	48"			1215
17-21 Ton	SDSR-017-021-W048T05	5	48"	1.75"	J250	1611
	SDSR-017-021-W054T05	5	54"			1492
	SDSR-017-021-W060T06	6	60"			1721
22-27 Ton	SDSR-022-027-W048T05	5	48"	2.00"	J300	1902
	SDSR-022-027-W060T06	6	60"			2278
	SDSR-022-027-W072T07	7	72"			2654
28-35 Ton	SDSR-028-035-W048T05	5	48"	2.50"	J350	2715
	SDSR-028-035-W060T06	6	60"	2.00"		2870
	SDSR-028-035-W072T07	7	72"			3338
36-44 Ton	SDSR-036-044-W060T06	6	60"	2.50"	J400	3795
	SDSR-036-044-W072T07	7	72"			4434
	SDSR-036-044-W084T08	8	84"	2.00"	J350	4105
45-55 Ton	SDSR-045-055-W060T06	6	60"	3.00"	J450	5592
	SDSR-045-055-W072T07	7	72"	2.50"	J400	5841
	SDSR-045-055-W084T08	8	84"			6663

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849
trkattachments.com
sales@trkattachments.com

All attachments include a 2 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

HEAVY DUTY ROOT RAKE



- Case hardened pin bosses.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Material easily flows through shanks leaving smaller stones & debris in the ground.
- Thick shanks support themselves without gussets.
- Heavy Duty Rakes are not designed for extreme applications (eg. Deep penetration in hard ground, ripping out large stumps and rocks, etc.). Please inquire about our Severe Duty Root Rakes which are designed for these extreme applications.



Correction: Edge is not beveled as shown in the photo.

CLICK TO CHECK AVAILABILITY & PRICING

Machine Class	Product Code	Tines	Width	Shank Thickness	Approx. Weight (Lbs)
8-11 Ton	HD RR-008-011-W036T04	4	36"	1.00"	511
	HD RR-008-011-W042T05	5	42"		537
	HD RR-008-011-W048T06	6	48"		643
12-16 Ton	HD RR-012-016-W036T04	4	36"	1.25"	786
	HD RR-012-016-W042T05	5	42"		824
	HD RR-012-016-W048T06	6	48"		978
17-21 Ton	HD RR-017-021-W048T04	4	48"	1.50"	1276
	HD RR-017-021-W054T05	5	54"		1190
	HD RR-017-021-W060T06	6	60"		1402
22-27 Ton	HD RR-022-027-W048T05	5	48"	1.75"	1692
	HD RR-022-027-W060T06	6	60"		1843
	HD RR-022-027-W072T07	7	72"		1993
28-35 Ton	HD RR-028-035-W048T05	5	48"	2.00"	2443
	HD RR-028-035-W060T06	6	60"		2416
	HD RR-028-035-W072T07	7	72"		2853
36-44 Ton	HD RR-036-044-W060T06	6	60"	2.00"	2851
	HD RR-036-044-W072T07	7	72"		3364
	HD RR-036-044-W084T08	8	84"		3155
45-55 Ton	HD RR-045-055-W060T06	6	60"	2.50"	4266
	HD RR-045-055-W072T07	7	72"		4707
	HD RR-045-055-W084T08	8	84"		5028

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849

trkattachments.com

sales@trkattachments.com

All attachments include a 2 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

HEAVY DUTY SCOOP RAKE



- Case hardened pin bosses.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Material easily flows through shanks leaving smaller stones & debris in the ground.
- Thick shanks support themselves without gussets.
- Heavy Duty Rakes are not designed for extreme applications (eg. Deep penetration in hard ground, ripping out large stumps and rocks, etc.). Please inquire about our Severe Duty Scoop Rakes which are designed for these extreme applications.



CLICK TO CHECK AVAILABILITY & PRICING

Machine Class	Product Code	Tines	Width	Shank Thickness	Approx. Weight (Lbs)
8-11 Ton	HDSR-008-011-W036T04	4	36"	1.00"	534
	HDSR-008-011-W042T05	5	42"		637
	HDSR-008-011-W048T06	6	48"		739
12-16 Ton	HDSR-012-016-W036T04	4	36"	1.25"	850
	HDSR-012-016-W042T05	5	42"		1013
	HDSR-012-016-W048T06	6	48"		1177
17-21 Ton	HDSR-017-021-W048T04	4	48"	1.50"	1383
	HDSR-017-021-W054T05	5	54"		1454
	HDSR-017-021-W060T06	6	60"		1670
22-27 Ton	HDSR-022-027-W048T05	5	48"	1.75"	1858
	HDSR-022-027-W060T06	6	60"		2221
	HDSR-022-027-W072T07	7	72"		2585
28-35 Ton	HDSR-028-035-W048T05	5	48"	2.00"	2647
	HDSR-028-035-W060T06	6	60"		2865
	HDSR-028-035-W072T07	7	72"		3329
36-44 Ton	HDSR-036-044-W060T06	6	60"	2.00"	3566
	HDSR-036-044-W072T07	7	72"		4161
	HDSR-036-044-W084T08	8	84"		4232
45-55 Ton	HDSR-045-055-W060T06	6	60"	2.50"	5440
	HDSR-045-055-W072T07	7	72"		5844
	HDSR-045-055-W084T08	8	84"		6659

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849

trkattachments.com

sales@trkattachments.com


All attachments include a 2 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

LOW PROFILE RAKE



A DIVISION OF LIFCO

- Features an extra wide body with close tines. These are used after all the large rocks and big stumps have been removed. They work great to get all the loose roots and smaller rocks out, leaving you with a nice landscaped finish.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Thick shanks support themselves without gussets.
- Standard screening gap is 6 inches. We do custom sizes between 4" and 8" as well, please call for custom quote.
- Heavy Duty Low Profile Rakes are not designed for extreme applications (eg. Deep penetration in hard ground, ripping out large stumps and rocks, etc.). Please inquire about our Severe Duty Rakes.

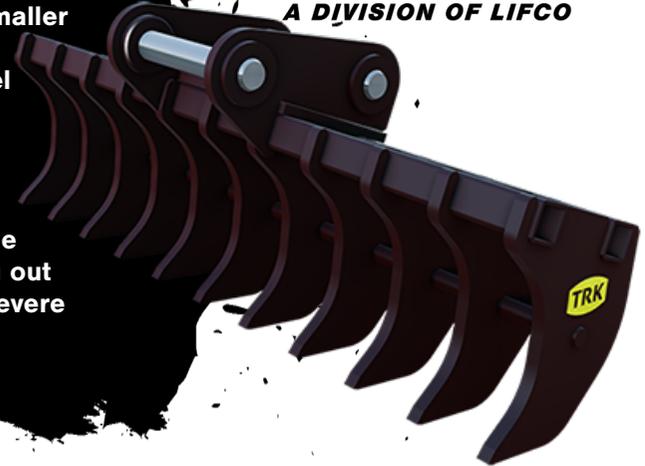

CLICK TO CHECK AVAILABILITY & PRICING

Machine Class	Product Code	Width	Shank Thickness	Rake Height	Approx. Weight (Lbs)
8-11 Ton	LOPR-008-011-W048T06	48"	0.75"	14"	489
	LOPR-008-011-W060T06	60"			550
	LOPR-008-011-W072T06	72"			648
12-16 Ton	LOPR-012-016-W060T06	60"	1.00"	15"	853
	LOPR-012-016-W072T06	72"			1003
	LOPR-012-016-W084T06	84"			1099
17-21 Ton	LOPR-017-021-W060T06	60"	1.25"	16"	1139
	LOPR-017-021-W072T06	72"			1261
	LOPR-017-021-W084T06	84"			1463
22-27 Ton	LOPR-022-027-W060T06	60"	1.25"	17"	1326
	LOPR-022-027-W072T06	72"			1462
	LOPR-022-027-W084T06	84"			1689
28-35 Ton	LOPR-028-035-W072T06	72"	1.50"	18"	2173
	LOPR-028-035-W084T06	84"			2505
	LOPR-028-035-W096T06	96"			2706
36-44 Ton	LOPR-036-044-W084T06	84"	1.75"	19"	2749
	LOPR-036-044-W096T06	96"			3141
	LOPR-036-044-W108T06	108"			3373
45-55 Ton	LOPR-045-055-W096T06	96"	2.00"	20"	3942
	LOPR-045-055-W108T06	108"			4454
	LOPR-045-055-W120T06	120"			4752

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849

trkattachments.com

sales@trkattachments.com

All attachments include a 2 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

LOW PROFILE SCOOP RAKE



A DIVISION OF LIFCO

- Features an extra wide body with close tines. These are used after all the large rocks and big stumps have been removed. They work great to get all the loose roots and smaller rocks out, leaving you with a nice landscaped finish.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Thick shanks support themselves without gussets.
- Standard screening gap is 6 inches. We do custom sizes between 4" and 8" as well, please call for custom quote.
- Heavy Duty Low Profile ScoopRakes are not designed for extreme applications (eg. Deep penetration in hard ground, ripping out large stumps and rocks, etc.). Please inquire about our Severe Duty Scoop Rakes.



CLICK TO CHECK AVAILABILITY & PRICING

Machine Class	Product Code	Tines	Width	Shank Thickness	Rake Height	Approx. Weight (Lbs)
8-11 Ton	LPSR-008-011-W048T08	8	48"	0.75"	20"	536
	LPSR-008-011-W060T09	9	60"			626
	LPSR-008-011-W072T11	11	72"			749
12-16 Ton	LPSR-012-016-W060T09	9	60"	1.00"	22"	982
	LPSR-012-016-W072T11	11	72"			1173
	LPSR-012-016-W084T12	12	84"			1308
17-21 Ton	LPSR-017-021-W060T09	9	60"	1.25"	25"	1354
	LPSR-017-021-W072T10	10	72"			1537
	LPSR-017-021-W084T12	12	84"			1805
22-27 Ton	LPSR-022-027-W060T09	9	60"	1.25"	28"	1670
	LPSR-022-027-W072T10	10	72"			1886
	LPSR-022-027-W084T12	12	84"			2210
28-35 Ton	LPSR-028-035-W072T10	10	72"	1.50"	32"	2544
	LPSR-028-035-W084T12	12	84"			2979
	LPSR-028-035-W096T13	13	96"			3260
36-44 Ton	LPSR-036-044-W084T11	11	84"	1.75"	36"	4140
	LPSR-036-044-W096T13	13	96"			4802
	LPSR-036-044-W108T14	14	108"			5213
45-55 Ton	LPSR-045-055-W096T12	12	96"	2.00"	40"	6025
	LPSR-045-055-W108T14	14	108"			6899
	LPSR-045-055-W120T15	15	120"			7444

Pins sold separately. Wedge Style Ears: Available (Non-standard only).

1-800-952-7849
trkattachments.com
sales@trkattachments.com

All attachments include a 2 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.

DEEP PENETRATION RAKE



- Case hardened pin bosses.
- Constructed from Canada and USA made T1 & AR400 Steel at all critical points.
- Extra thick shanks support themselves without gussets.
- Comes standard with CAT style J-Series teeth. If you require a different style of tooth, please inquire.



CLICK TO CHECK AVAILABILITY & PRICING

Machine Class	Product Code	Tines	Width	Shank Thickness	Tooth Type	Ground Penetration	Approx. Weight (Lbs)
8-11 Ton	DPRR-008-011-W022T04	4	22"	1.25"	J225	24"	621
	DPRR-008-011-W026T05	5	26"				765
12-16 Ton	DPRR-012-016-W034T04	4	34"	1.50"	J225	28"	983
	DPRR-012-016-W046T05	5	46"				1263
17-21 Ton	DPRR-017-021-W042T04	4	42"	1.75"	J250	32"	1457
	DPRR-017-021-W054T05	5	54"				1838
22-27 Ton	DPRR-022-027-W042T04	4	42"	2.00"	J300	36"	1829
	DPRR-022-027-W048T05	5	48"				2221
	DPRR-022-027-W054T06	6	54"				2612
28-35 Ton	DPRR-028-035-W042T04	4	42"	2.50"	J400	38"	2809
	DPRR-028-035-W048T05	5	48"				2.00"
	DPRR-028-035-W054T06	6	54"	3236			
36-44 Ton	DPRR-036-044-W054T05	5	54"	2.50"	J400	40"	3629
	DPRR-036-044-W060T06	6	60"				4192
	DPRR-036-044-W066T07	7	66"				4813
45-55 Ton	DPRR-045-055-W048T05	5	48"	3.00"	J450	42"	4660
	DPRR-045-055-W060T06	6	60"				5647
	DPRR-045-055-W072T07	7	72"				6643

Pins sold separately. Wedge Style Ears: Available (Non-standard patterns, additional charges may apply).

1-800-952-7849

trkattachments.com

sales@trkattachments.com

All attachments include a 2 year limited warranty. If you have any questions or have a custom requirement for your attachment, please give us a call.



A DIVISION OF LIFCO

©2026 Lifco Hydraulics. All Rights Reserved.